


Instruction manual

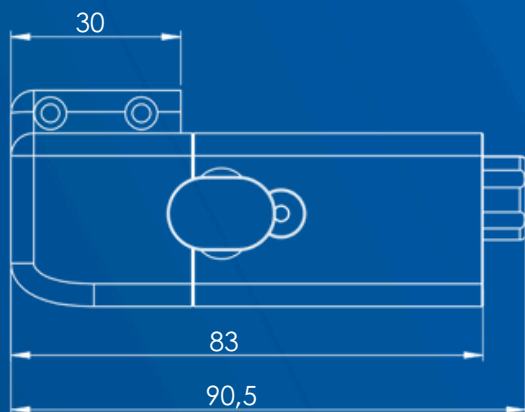


AVAILABLE MODELS

mod. HSB

It allows the gun body to be heated from a temperature of approximately 30°C to 90°C



The use of protective gloves is recommended.

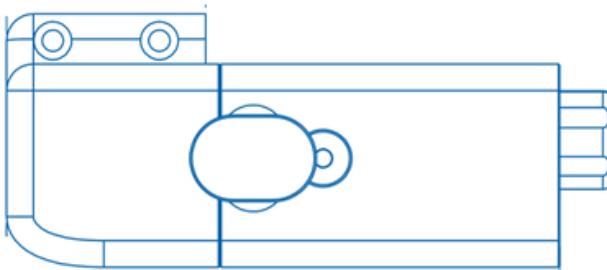

Index

Instruction Manual

Warnings	.04
Maintenance and cleaning	.04
Installation	.05
Technical Data	.08
Troubleshooting	.09
Spare parts and components	.11
Certified quality	.12
Support	.12



WARNINGS!

Carefully read and follow all instructions and safety precautions before using the product.



MANUALS

Our manuals are available at aircom.it/en/support/manuals/
Or, by scanning the QR Code on this page.

WARNINGS

CORROSIVE WARNINGS

PRODUCT

Our guns can atomize every type of fluid products. However, they are not designed to spray abrasive and/or corrosive products. If abrasive and/or corrosive products are used, guns with components made of the appropriate material can be ordered.

HEALTH HAZARD

Some atomized products may be harmful and cause irritation or health disorders. Careful reading of all labels and instructions on how to use the product are necessary. Use of the product is restricted to trained technical personnel, with the use of special safety glasses when adjusting the gun and, while the system is operating.

MAINTENANCE AND CLEANING

MAINTENANCE

Before any maintenance work, empty the gun and disconnect it from both, the compressed air supply, and the liquid supply. Use only original AIRCOM® accessories, spare parts, and related components: any other product not supplied by AIRCOM® is not approved or authorized. AIRCOM® is not liable for any damage caused by using non-original spare parts and accessories. Do not use mineral grease.

CLEANING

Use exclusively appropriate liquid cleaners with neutral pH 6-8. Do not use acids, alkaline solutions or other cleaning agents containing sodium hydroxide, which are aggressive for cleaning the exterior of the gun. Do not immerse the gun in liquid cleaners that may cause corrosion of the product. Clean all material passages by propagating water within the product circuit: inadequate cleaning can cause damages to the fan shape. While cleaning, avoid scratching the surfaces of the air nozzle holes and the needle.

It is recommended to leave the AIRCOM® FF-Q product mounted on the AIRCOM® QRB2 in case of internal cleaning of the system.

INSTALLATION



TECHNICAL SPECIFICATIONS

- Thermocouple: **E**
- 24V heating cartridge: **C**

Connect thermocouple E and heating cartridge C to a thermoregulator to manage the working temperature of the gun.

Total weight of FF-Q + QRB2 + HSB: 1,017 kg

Size: see dimensional views


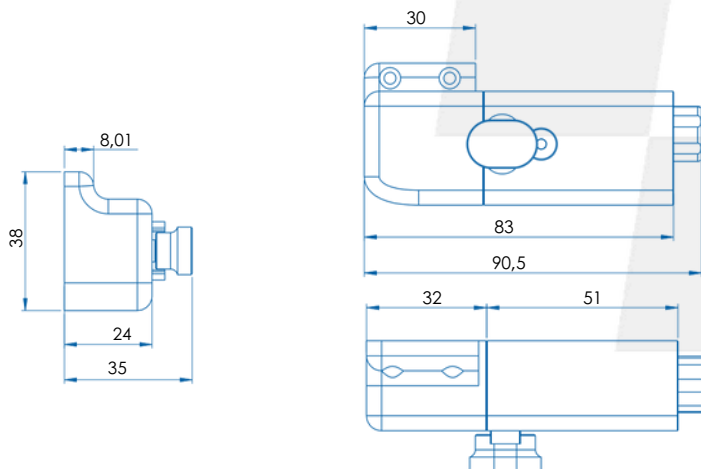
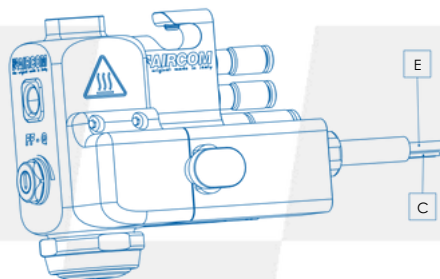


VIDEO TUTORIALS ►

Our video tutorials are available at aircom.it/en/support/tutorials/
Or, by scanning the QR Code on this page.

TOTAL DIMENSIONS

Total dimensions of FF-Q + QRB2 + HSB

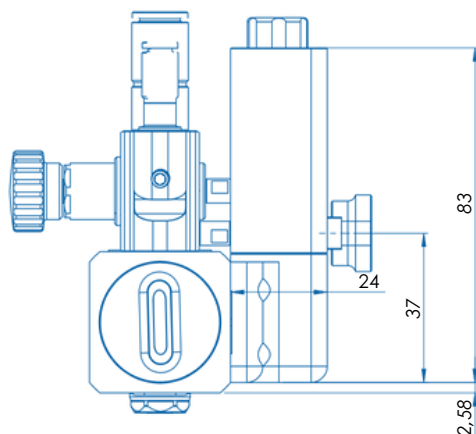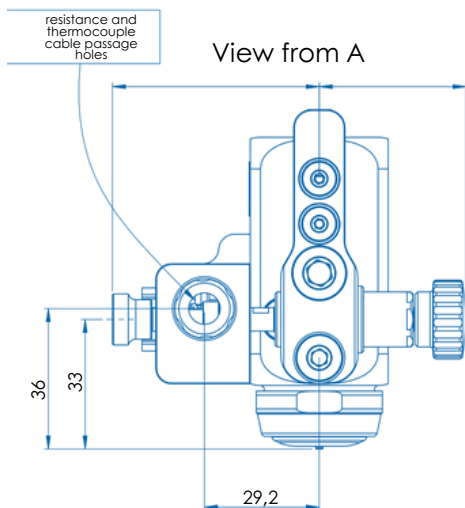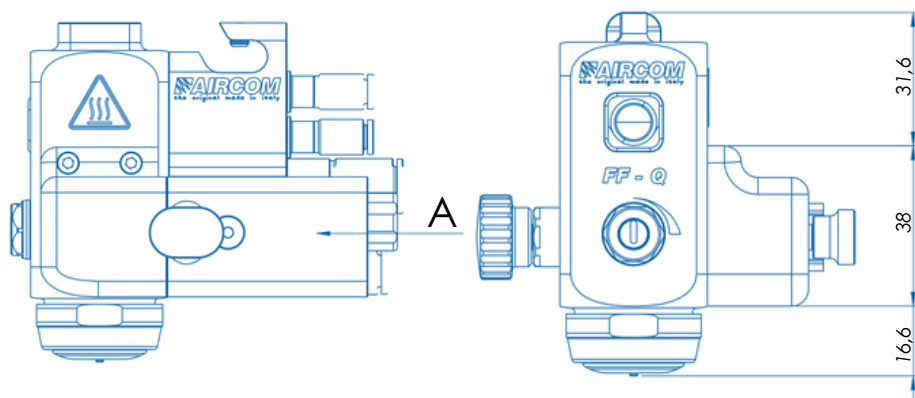

ATTACHMENT

1. Make sure to release the heating plate.


Pull and then rotate knob A by 90°. Make sure that knob A is in a vertical position and resting on the plastic teeth D (as in the figure).

2. Insert the fittings of the FF-Q gun into the relative seats of the QRB2 block.

3. Press the FF-Q gun against the QRB2 block until you hear the click of knob B

4. Rotate knob A 90° to a horizontal position, centering the seat in the middle of the plastic teeth D

5. Help knob A to retract completely by pressing it all the way down.

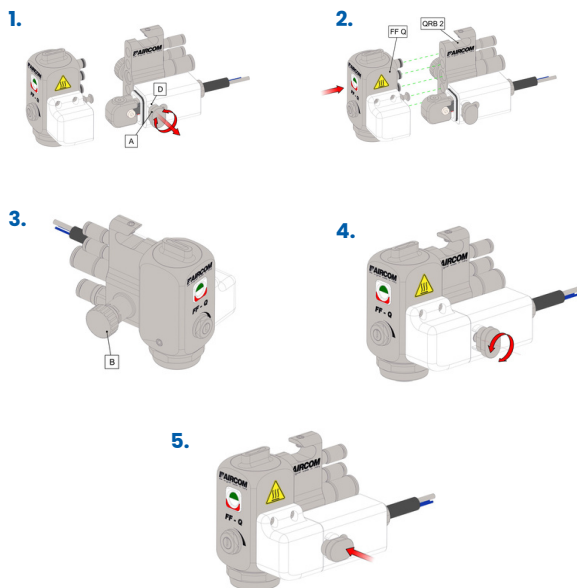


RELEASE

6. Pull and then rotate knob A by 90°.

Release the knob A by placing it on the plastic teeth D (as in the figure).

7. Pull knob B to release the FF-Q gun from the QRB2 block

8. Remove the FF-Q gun.

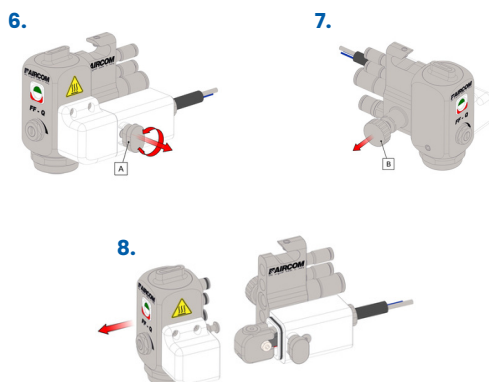

TECHNICAL DATA

Temperature set by thermoregulator (°C)	Internal nozzle seat temperature (°C)	External body temperature (°C)	Time (min.)
75	30	30	5
	38	37,5	10
	39	38	15
65	40	40	20
	42	41	25
	43	42	30



NOTE

Room temperature 18°

TROUBLESHOOTING

Anomaly	Problem / Solution
Excessive Temperature	Thermoregulator programming error Check thermoregulator programming
Temperatura not rising	Thermocouple E broken Replace crankcase assembly with thermal elements part. [1358-G48] broken
	Thermoregulator programming error Check thermoregulator programming
	Broken heating cartridge C Replace crankcase assembly with thermal elements part. [1358-G48] broken

Spare parts and components

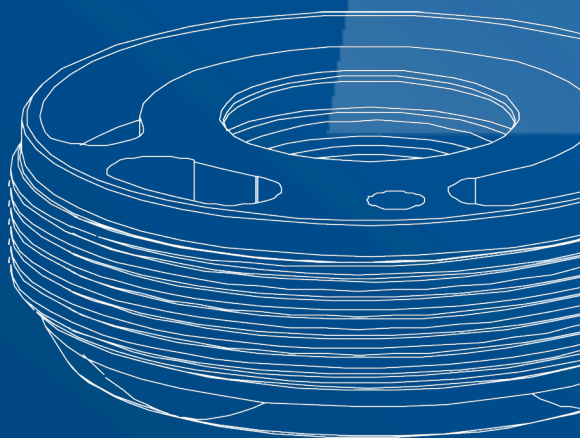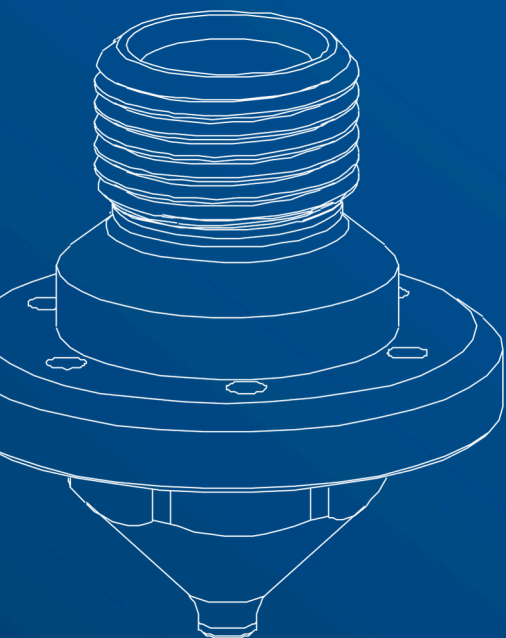


SPARE PARTS

DETAILS LIST

mod. HSB

1358-G47 [x1] FF gun side crankcase assembly

1358-G48 [x1] Crankcase group with thermal elements

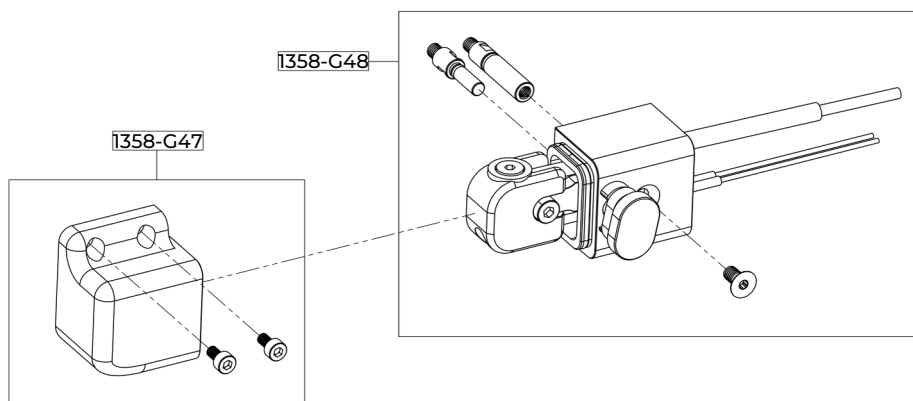

CERTIFIED QUALITY

CERTIFICATIONS

The product, with a body entirely in stainless steel and specific OR/sealings, complies with FDA requirements.



THREE-COLOR INSERT

Each gun is marked with a three-color three-dimensional seal. It represents an additional guarantee of authenticity and Italianity because it is present exclusively in original AIRCOM® guns.



SUPPORT

DO YOU NEED HELP?

We are at your disposal.




+39 0124 5154 44



aircom@aircom.it



Online support

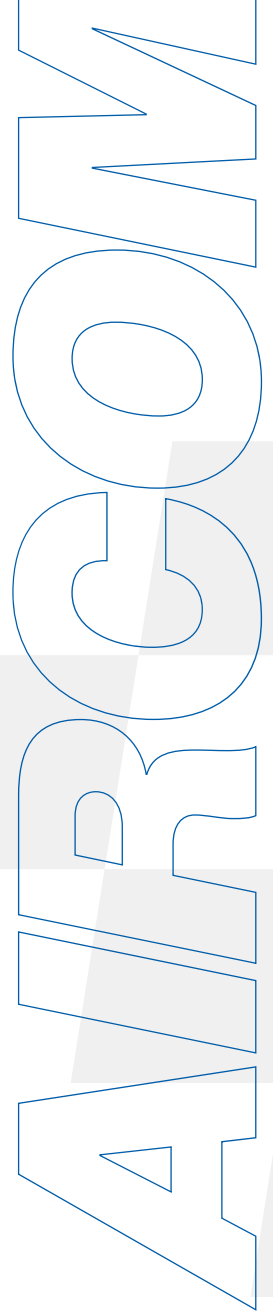

AIRCOM



DISCOVER ALL PRODUCTS



Follow us



aircom.it